Switch

EGS-S3104F3L2

Active Deterrence

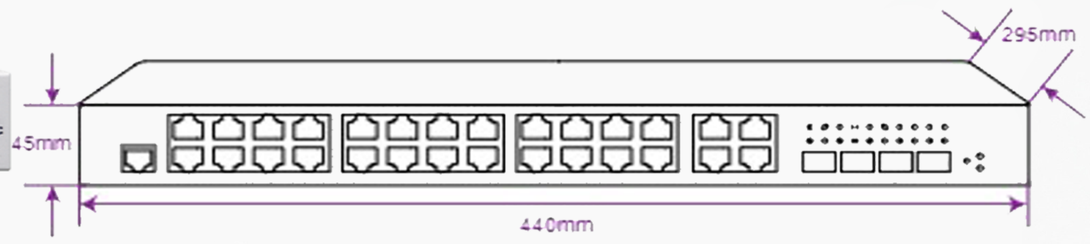

2 Years Cadmium Guarantee

۲ سال گارانتی پالادیم
بدون قید وشرط ایی جی اس

قابلیت ارائه فرم ور امنیتی جهت استفاده در مراکز فوق حساس و نظامی-فاقد قابلیت دسترسی از طریق اینترنت

عملکرد های اصلی

- دارای 24 پورت 100/10POE
- دارای 3 پورت UPlink RJ45 1000/100/10
- دارای3 پورت1000/100/10 SFP UPlink
- دارای یک پورت RJ45 UPlink1K Plus/100/10
- نمایش وضعیت پورت ها از طریق LED
- ارسال برق از طریق شبکه تا 250 متر
- بدون نیاز به برنامه ریزی دستگاه
- توان 600 وات دارای

بـرتـری ها

- سخت افزار منحصر به فرد جهت پایداری در تمام شرایط
- بدنه با استفاده از رنگ های الکترواستاتیک
- بدنه تمام فلز
- دارای قابلیت هوشمند بدون نیاز به برنامه ریزی شامل VLAN
- قابلیت ارسال برق و دیتا به سوئیچ های 4 و 8 پورت ایی جی

Interfaces	
Total Port	31Port
MAX POE Output	600Wat
POE Port Control	808AR
Fast RJ45 Port	24
Gigabit RJ45 Port	N/A
Fast RJ45Uplink Port	N/A
Gigabit RJ45 Uplink	3
Gigabit SFPUplink	3
Combo Uplink Port	N/A
Performance	
Standard	IEEE802.3x,IEEE802.3u,IEEE802.3az,IEEE802.3ab
Protocols	CSMA/CD
PD;S	
IP Camera	Yes
IP Phone	Yes
+5/4-8/7	Yes
+21-6/3	Yes
Power Supply	
Power	200,240V.AC,50.60Hz
Redundant	N/A
LED Power	Yes
Power Cable	Avallable
Status	
LED	Ethernet Interfaces 1000LNK /ACT Green,10/100LNK/ACT Orange
LED Panel	Data Activity

General	
IP Rating	IP51
Web Language	N/A
Dimension	440*273*45
Weight	3Kg
Storage Temp	-20C+60C10%90%RH
Operation Temp	-15C+60C10%90%RH
Network Performance	
Standard	IEEE802.3x,IEEE802.3u,IEEE802.3az,IEEE802.3ab
Protocols	CSMA/CD
Router	N/A
Speed	Ethernet 10Mbps 20Mbps Full duplex 108BASE-T:14,880bps/port Fast Ethernet 100Mbps/half duplex,200Mbps fulduplex Fast Ethernet 1000Mbps/half ,2000Mbps fulduplex
Bandwidh	15Gb Internal Bandwidth
MAC Table	1MB
Hrdware	
Processor Type	IC+
LED Panel	POE Activity
Main Board	Double Layer
Case	Metal Case
Mouning	Rackmount
Auto MDI-MDIX	Yes All ports
Transfer Pattern	Store&Forward
Guarantee	
Product Guarantee	2Years Palladium Guarantee
MTBF	100K hrs min. ML-HDBK-217F 25